




Push Pull

Push/Pull is rugged, heavy-duty attachments for high cycle slipsheet applications requiring high productivity with low maintenance. Products typically handled with a push/pull include: bagged products, cased products, glass etc.

Product Specifications

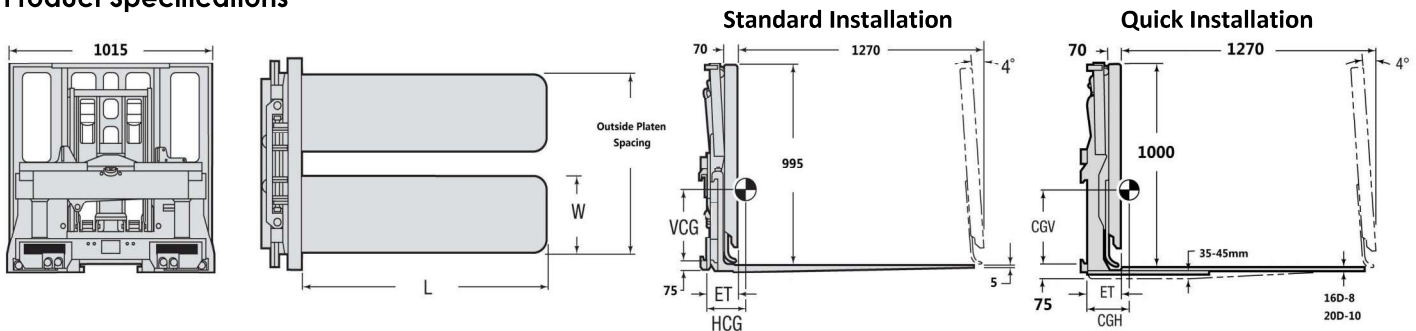

Model Number	Capacity @ Load Center (kg@mm)	Type	Mtg. Class (ISO)	Min.Truck Carriage Width (mm)	Platen Size WxL (mm)	Outside Platen Spacing (mm)	ET (mm)	HCG (mm)	VCG (mm)	Weight (kg)
Quick Installation										
TL16D01B	1600@600	non-retaining	II	760	380x1220	865 or 1015	165	226	320	336
TL16D02B	1600@600	non-retaining	II	790	455x1220	1015 or 1170	165	246	305	347
TL16D03B	1600@600	pallet retaining	II	760	380x1220	865 or 1015	236	254	295	411
TL16D04B	1600@600	pallet retaining	II	790	455x1220	1015 or 1170	236	269	290	424
TL20D01B	2000@600	non-retaining	II	790	380x1220	865 or 1015	165	246	305	347
TL20D02B	2000@600	non-retaining	II	790	455x1220	1015 or 1170	165	264	295	361
TL20D03B	2000@600	pallet retaining	II	790	380x1220	865 or 1015	236	272	290	424
TL20D04B	2000@600	pallet retaining	II	790	455x1220	1015 or 1170	236	290	275	438
Standard Installation										
TL16G01B	1600@600	non-retaining	II	915	380x1220	865 or 1065	165	203	235	479
TL16G02B	1600@600	non-retaining	II	915	455x1220	1015 or 1220	165	221	225	501
TL16G03B	1600@600	pallet retaining	II	915	380x1220	865 or 1065	229	239	225	603
TL16G04B	1600@600	pallet retaining	II	915	455x1220	1015 or 1220	229	257	210	633
TL20G01B	2000@600	non-retaining	II	915	380x1220	865 or 1065	165	211	230	490
TL20G02B	2000@600	non-retaining	II	915	455x1220	1015 or 1220	165	231	215	515
TL20G03B	2000@600	pallet retaining	II	915	380x1220	865 or 1065	229	239	225	603
TL20G04B	2000@600	pallet retaining	II	915	455x1220	1015 or 1220	229	257	210	633

- Obtain the actual capacity of the forklift and attachments from the forklift manufacturer.
- Above types are the standard types. Please contact the sales person for any special request.

